

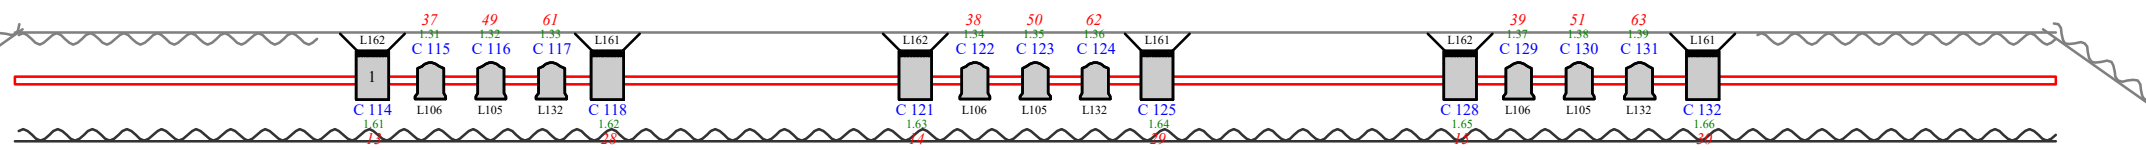
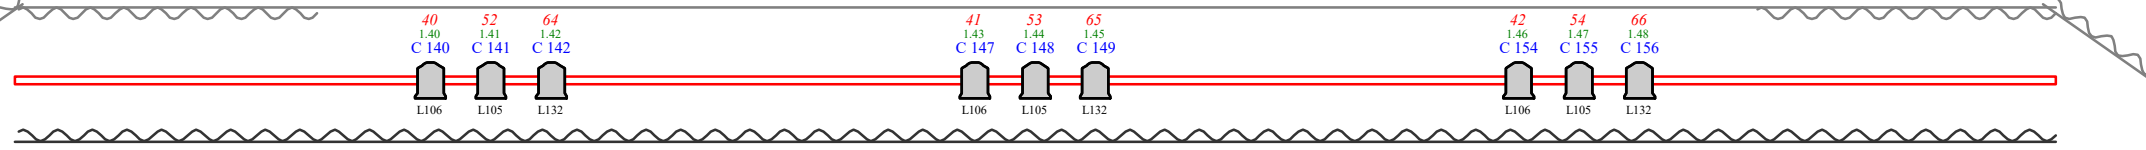


0m 6.5m 6.0m 5.5m 5.0m 4.5m 4.0m 3.5m 3.0m 2.5m 2.0m 1.5m 1.0m 0.5m 0.0m 0.5m 1.0m 1.5m 2.0m 2.5m 3.0m 3.5m 4.0m 4.5m 5.0m 5.5m 6.0m 6.5m 7.0m 7.5m


Tab 3



Tab 2

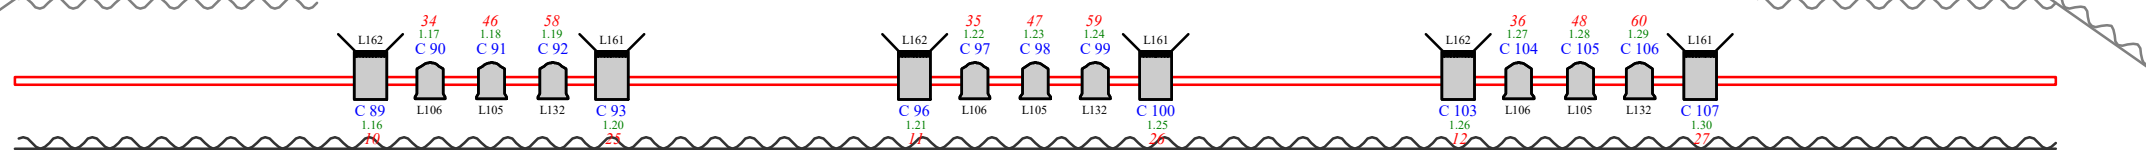

Tab 1

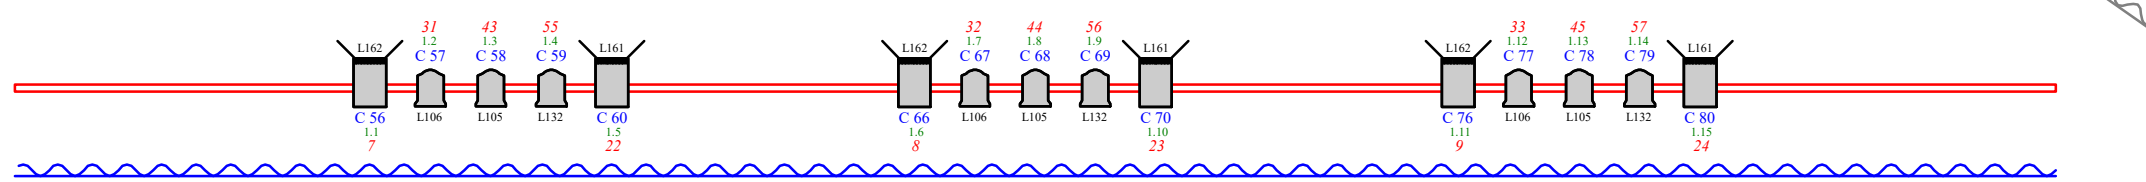

10.702m

Symbol	Name	Lamp	Count	Notes
	1200 Condensor Zoom Narrow	T/29 230V	6	8°-16°
	1200 Zoomspot Medium	T/29 230V	12	18°-3°
	Strand Lighting Harmony Fresnel	T/29 230V	36	7.5°-4°
	Aurora Cyc 4 Way Linear	ELL	5	
	Selecon SF1200 High Performance Fresnel	T/29 230V	18	

Standard color	Dimmer circuits:	Floor dip circuits layout:
Face wash:	LX5 = 161-185	upstage
L162 Bastard Amber	LX4 = 136-160	21-25 46-50
L161 Slate Blue	LX3 = 111-135	16-20 41-45
	LX2 = 86-110	11-15 36-40
Overhead wash:	LX1 = 51-85	6-10 31-35
L105 Orange	Perch 1 = 33-36 OP, 45-48 PS	1-5 26-30
L132 Medium Blue	Perch 2 = 37-40 OP, 49-52 PS	downstage
L106 Primary Red	Perch 3 = 41-44 OP, 53-56 PS	
	FOH 1 = 16 circuits. Dimmers available = 97-126	
Cyc:	FOH 2 = 16 circuits. Dimmers available = 97-106 + 126-136	
L106 Primary Red		
L158 Deep Orange		
L119 Dark Blue		
L122 Fern Green		

	<b>Clarence Street Theatre</b>	
	<b>Standard Lighting Rig</b>	

